

Linking a SPEAQ ID


A step-by-step guide for Head Fellow & Hub Manager

Use this guide to link a farmer to their own SPEAQ ID, so the farmer can sign in to Plexaris Agri. The farmer creates their identity on their own phone. You only guide them and confirm the link.

Who can do this: Head Fellow and Hub Manager. You can only link farmers in your own hub.

The main steps (the farmer has a smartphone)

- 1 Open the farmer's profile and tap **Start onboarding**.

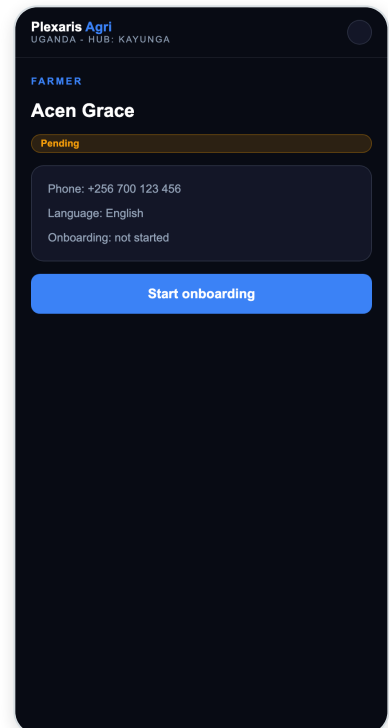

- 2 At "Does the farmer have a smartphone?", tap **Yes, has a smartphone** .

The screenshot shows the 'SPEAQ onboarding' screen of the Plexaris Agri app. At the top, it says 'Plexaris Agri' and 'UGANDA - HUB: KAYUNGA'. Below that, it says 'ONBOARDING' and 'SPEAQ onboarding'. A sub-header reads: 'Guide the farmer step by step. The farmer creates their SPEAQ identity on their OWN phone; Plexaris Agri never holds their keys.' The main content area has a question: 'Does the farmer have a smartphone?'. There are two buttons: a blue one labeled 'Yes, has a smartphone' and a grey one labeled 'No smartphone'.

- 3 Help the farmer install the SPEAQ ID app (`app.speaq.id`) and create their identity on their own phone. Then tap **Start linking (QR / code)** .


The screenshot shows the 'Set up SPEAQ ID on the farmer's phone' screen of the Plexaris Agri app. At the top, it says 'Plexaris Agri' and 'UGANDA - HUB: KAYUNGA'. Below that, it says 'ONBOARDING' and 'Set up SPEAQ ID on the farmer's phone'. The main content area has three numbered steps: 1. 'Open this address on the farmer's phone and install the SPEAQ ID app: `app.speaq.id`'. 2. 'Let the farmer create their identity in the SPEAQ ID app (their own keys, on their own phone)'. 3. 'When the identity is ready, start the link step: the farmer scans the QR code or enters the 6-digit code.' Below the steps is a green box with text: 'The keys stay on the farmer's phone. Plexaris staff never enter or store them.' At the bottom is a blue button labeled 'Start linking (QR / code)'.

- 4 The farmer scans the QR code (or types the 6-digit code) in their SPEAQ ID app and approves.



- 5 You see **Farmer bound. They can now sign in.** The farmer is linked. Done.

Keys stay with the farmer. The farmer's keys never leave the farmer's phone. Plexaris staff never enter or store them.

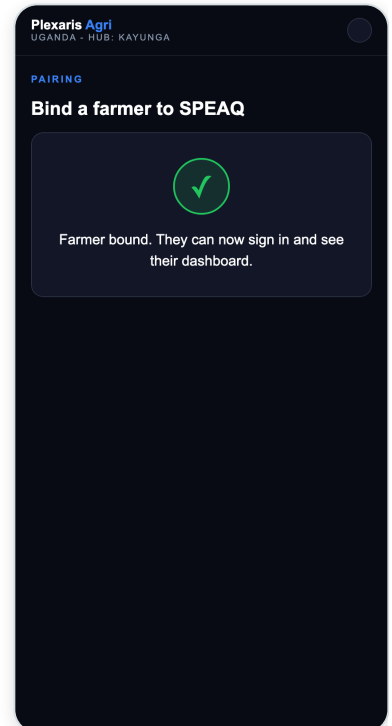


Special cases

The farmer has no SPEAQ ID yet

This is normal. The farmer creates their SPEAQ ID during step 3, on their own phone. There is nothing extra to do.


The farmer has no smartphone

At the question, tap **No smartphone**, then tap **Confirm: no smartphone**. The farmer uses USSD until they get a phone. Their status then shows "No phone (USSD pending)".

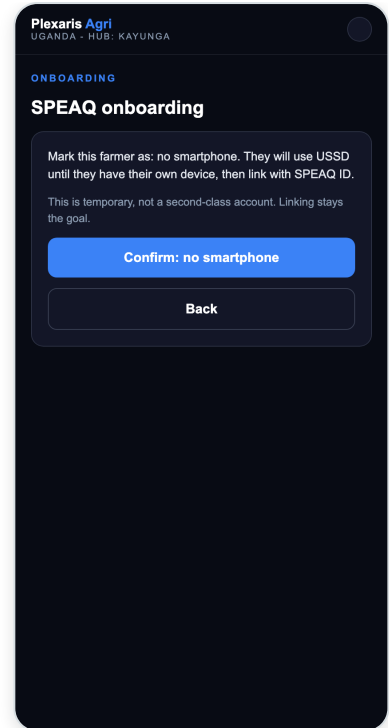


The farmer is already linked

The "Start onboarding" button is not shown. If you open the link page, it says "[name] is already linked to an account." There is nothing to do.

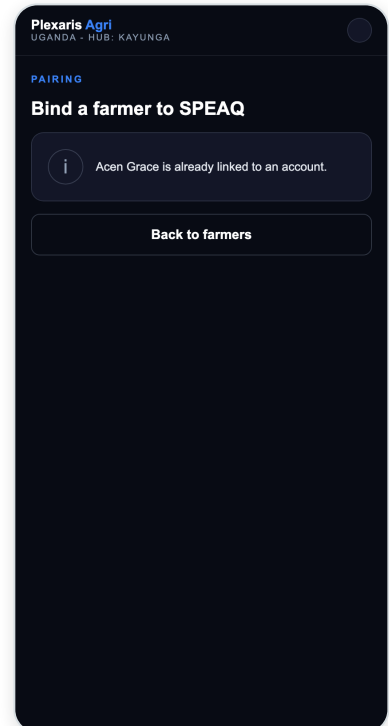


Something went wrong (wrong phone approved, code expired, or ID already in use)

An error message appears on the link page. Ask the farmer to try again from their SPEAQ ID app, then repeat step 4.

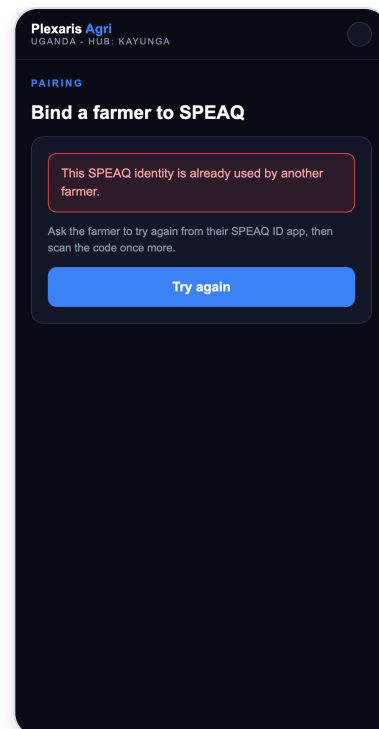

The farmer got a phone later (was marked "no smartphone")

Open onboarding and tap **Undo (farmer now has a smartphone)**. Then follow the main steps above.

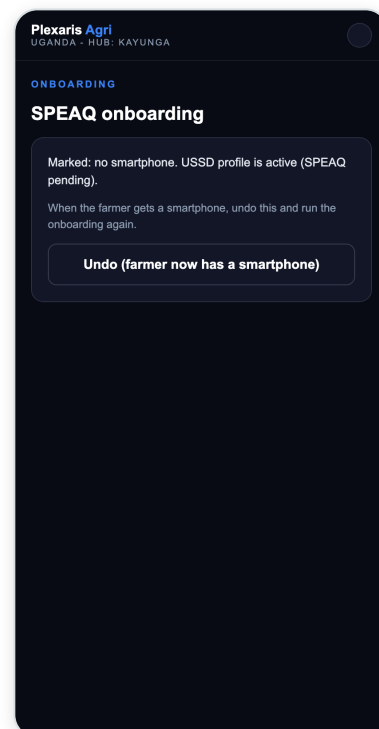

DRAFT - Oluganda. Kyetaaga okukeberegwa omuntu amanyi Oluganda nga tekinnasaasaanyizibwa. (Draft Luganda - needs native review before distribution.)

PLEXARIS AGRI UGANDA

Linking a SPEAQ ID


Obulagirizi obw'amatabi eri Head Fellow ne Hub Manager

Kozesa obulagirizi buno okugatta omulimi ku SPEAQ ID ye, asobole okuyingira mu Plexaris Agri. Omulimi atonda kye kimulaga ku ssimu ye; ggwe omulagirira era okakasa okugatta.


Ani asobola okukola kino: Head Fellow ne Hub Manager. Osobola kugatta balimi ab'omu hub yo yokka.

Amatabi amakulu (omulimi alina ssimu ya smartphone)


- 1 Ggulawo profayiro y'omulimi onyige **Start onboarding**.

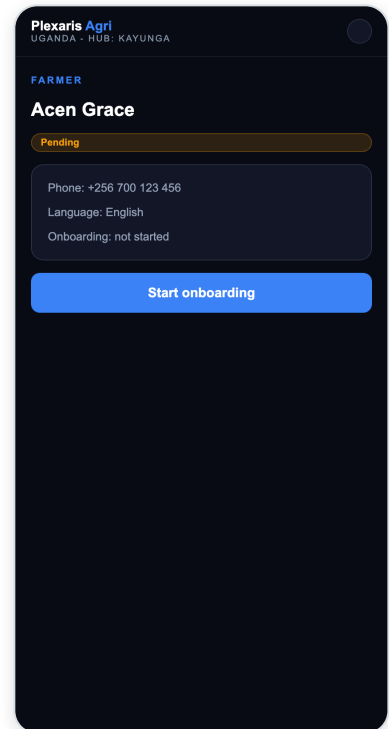


- 2 Ku kibuuza "Does the farmer have a smartphone?" nyiga **Yes, has a smartphone** .

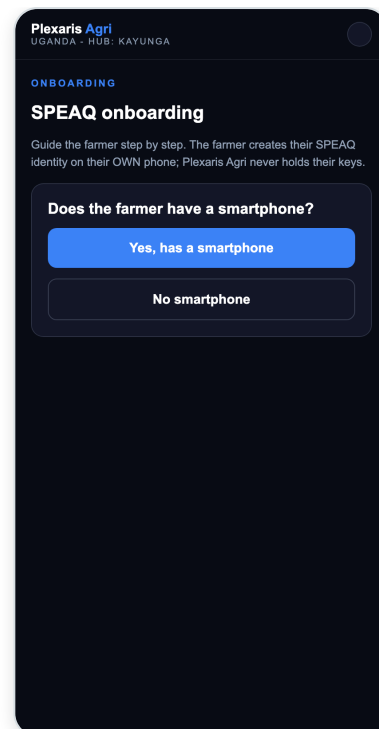


- 3 Yamba omulimi okuteeka app ya SPEAQ ID (`app.speaq.id`) n'okutonda kye kimulaga ku ssimu ye. Olwo onyige **Start linking (QR / code)** .

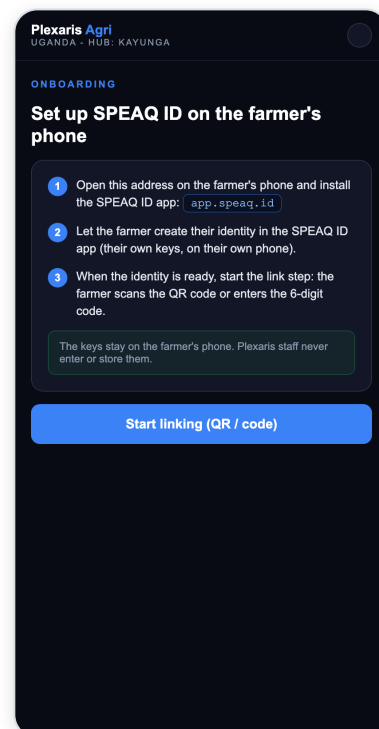

- 4 Omulimi asikinnya akabonero (QR) oba awandiika ennamba ey'ennukuta 6 mu app ye eya SPEAQ ID, n'akakasa.

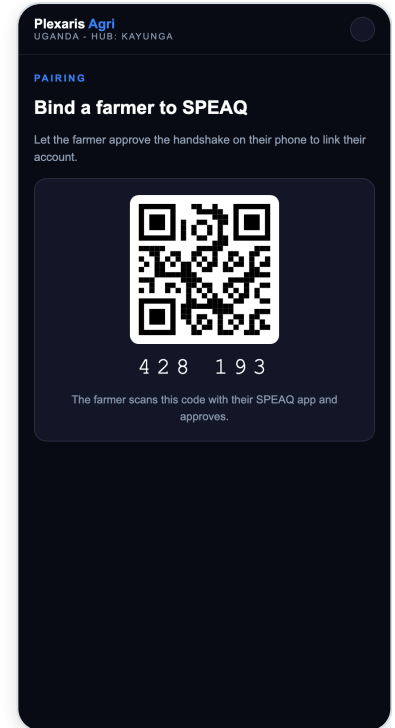

- 5 Olaba **Omulimi agattiddwa. Kati ajja kuyingira.**
- Ebisumuluzo bisigala ku mulimi.** Ebisumuluzo by'omulimi tebivaavo ku ssimu ye. Abakozi ba Plexaris tebabiyingiza wadde okubitereka.

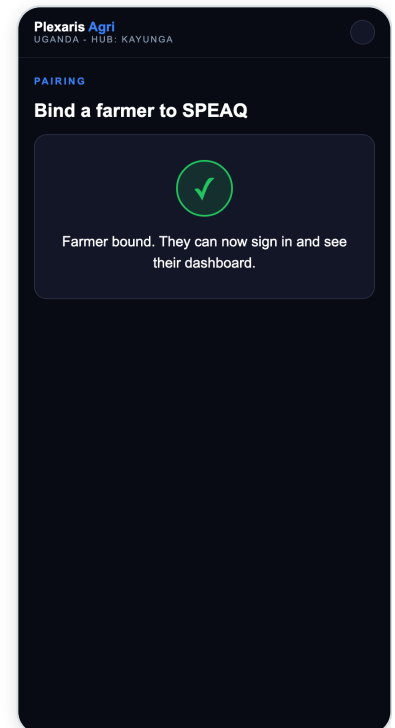

Embeera ez'enjawulo


Omulimi tannaba kufuna SPEAQ ID

Kino kya bulijjo. Omulimi atonda SPEAQ ID ye mu mutendera 3, ku ssimu ye. Tewali kirala ky'okola.

Omulimi talina ssimu ya smartphone


Ku kibuuzo, nyiga **No smartphone** olwo onyige

Confirm: no smartphone . Omulimi akozesa USSD okutuusa lw'afuna ssimu. Embeera ye eraga "No phone (USSD pending)".

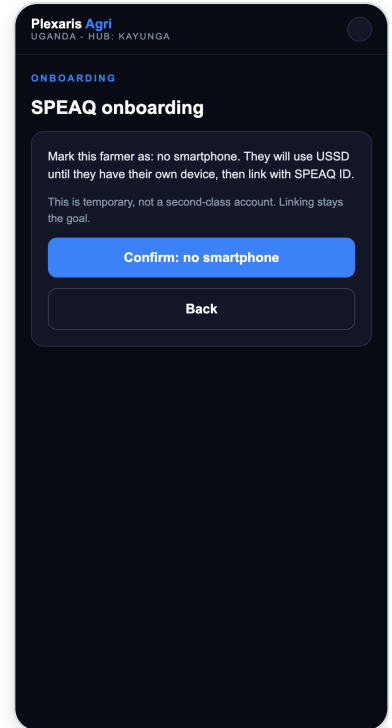

Omulimi yagattiddwa dda

Akabonero "Start onboarding" tekalabika. Bw'oggulawo olupapula olw'okugatta, lugamba "[name] is already linked to an account." Tewali ky'okola.


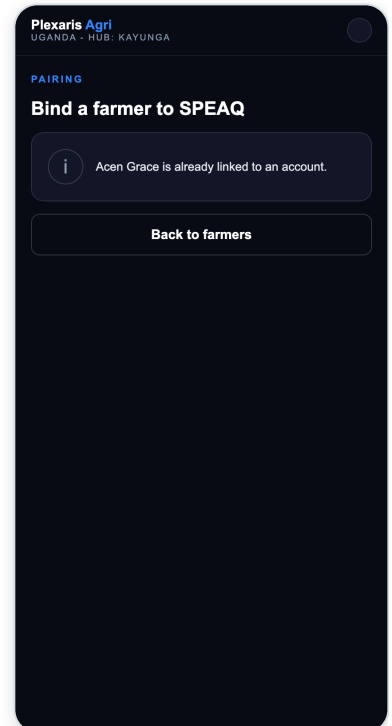


Waliwo ekyali kikyamu (ssimu enkyamu ekakasizza, koodi eyise, oba ID ekozeseddwa dda)

Obubaka obw'ensobi bujja kulabika ku lupapula olw'okugatta. Saba omulimi addemu okugezaako okuva mu app ye eya SPEAQ ID, olwo oddemu omutendera 4.

Omulimi afunye ssimu oluvannyuma (yali alonedddwa "no smartphone")

Ggulawo onboarding onyige **Undo (farmer now has a smartphone)** .
Olwo goberera amatabi amakulu waggulu.

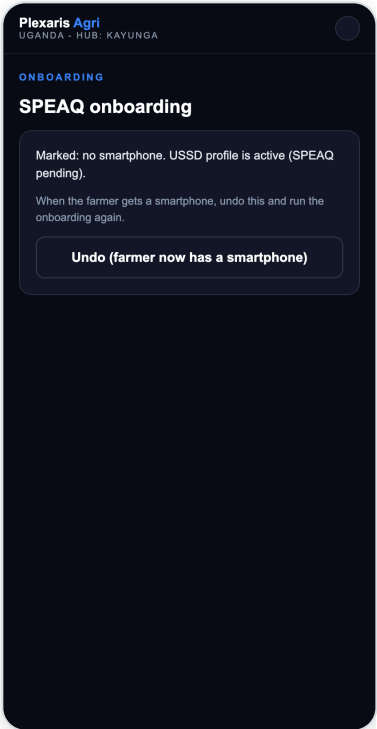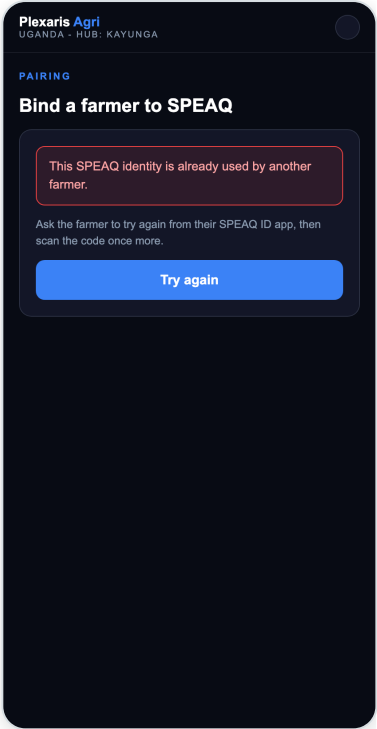

SWAHILI (DRAFT - native review needed)

RASIMU - Kiswahili. Inahitaji kukaguliwa na mzungumzaji asili kabla ya kusambazwa. (Draft Swahili - needs native review before distribution.)

PLEXARIS AGRI UGANDA

Linking a SPEAQ ID


Mwongozo wa hatua kwa hatua kwa Head Fellow na Hub Manager

Tumia mwongozo huu kuunganisha mkulima na SPEAQ ID yake, ili aweze kuingia kwenye Plexaris Agri. Mkulima huunda utambulisho wake kwenye simu yake mwenyewe; wewe unamwongoza tu na kuthibitisha kuunganishwa.

Nani anaweza kufanya hili: Head Fellow na Hub Manager. Unaweza kuunganisha wakulima wa kituo chako tu.

Hatua kuu (mkulima ana simu janja)

1 Fungua wasifu wa mkulima kisha gusa **Start onboarding**.

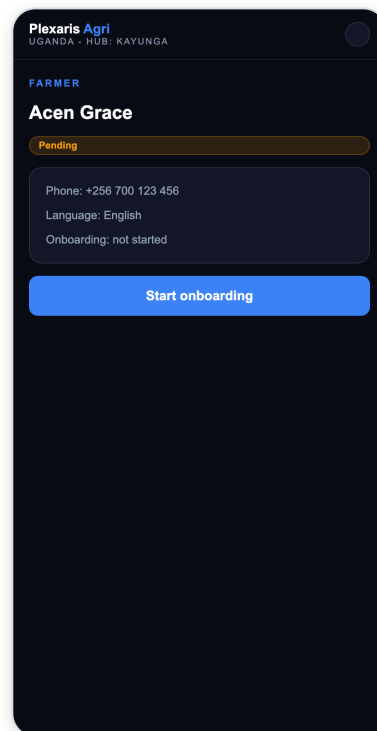

- 2 Kwenye swali "Does the farmer have a smartphone?" gusa **Yes, has a smartphone** .

Plexaris Agri
UGANDA - HUB: KAYUNGA

ONBOARDING

SPEAQ onboarding

Guide the farmer step by step. The farmer creates their SPEAQ identity on their OWN phone; Plexaris Agri never holds their keys.

Does the farmer have a smartphone?

Yes, has a smartphone

No smartphone

- 3 Msaidie mkulima kusakinisha programu ya SPEAQ ID (`app.speaq.id`) na kuunda utambulisho wake kwenye simu yake. Kisha gusa **Start linking (QR / code)** .

Plexaris Agri
UGANDA - HUB: KAYUNGA

ONBOARDING


Set up SPEAQ ID on the farmer's phone

- 1 Open this address on the farmer's phone and install the SPEAQ ID app: `app.speaq.id`
- 2 Let the farmer create their identity in the SPEAQ ID app (their own keys, on their own phone).
- 3 When the identity is ready, start the link step: the farmer scans the QR code or enters the 6-digit code.

The keys stay on the farmer's phone. Plexaris staff never enter or store them.


Start linking (QR / code)

- 4 Mkulima anaskani msimbo (QR) au anaandika nambari ya tarakimu 6 kwenye programu yake ya SPEAQ ID, na kuthibitisha.

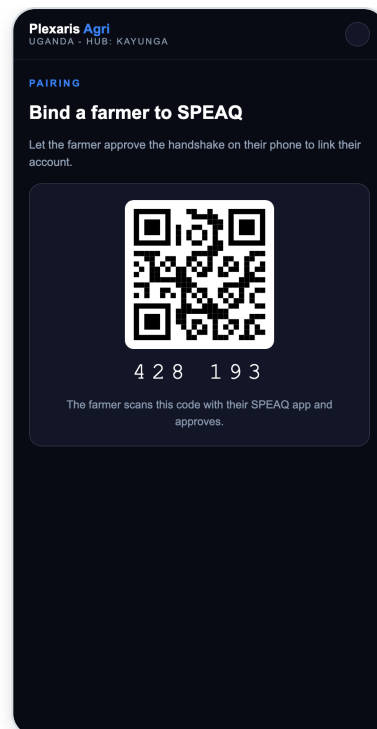

- 5 Unaona **Mkulima ameunganishwa. Sasa anaweza kuingia.**

Funquo zinabaki kwa mkulima. Funquo za mkulima haziondoki kwenye simu vake. Wafanyakazi wa Plexaris kamwe hawaziingizi wala kuzihifadhi.

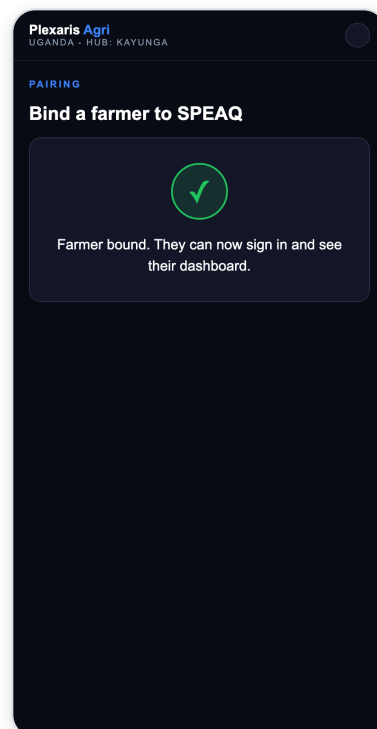


Hali maalum

Mkulima bado hana SPEAQ ID

Hii ni kawaida. Mkulima huunda SPEAQ ID yake katika hatua ya 3, kwenye simu yake. Hakuna jambo lingine la kufanya.


Mkulima hana simu janja

Kwenye swali, gusa **No smartphone** kisha gusa **Confirm: no smartphone**. Mkulima atatumia USSD hadi apate simu. Hali yake itaonyesha "No phone (USSD pending)".

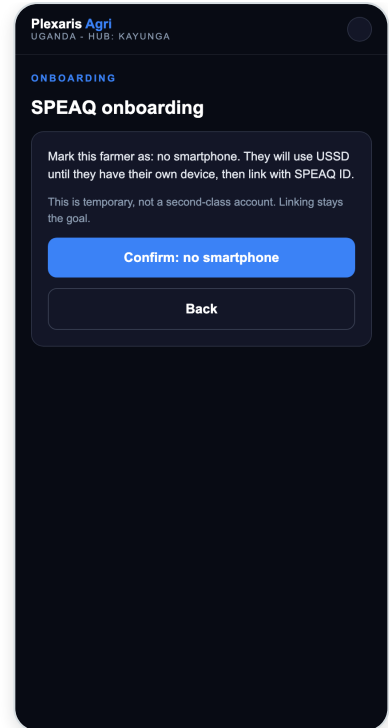

Mkulima ameshaunganishwa

Kitufe "Start onboarding" hakionekani. Ukifungua ukurasa wa kuunganisha, unasema "[name] is already linked to an account." Hakuna la kufanya.

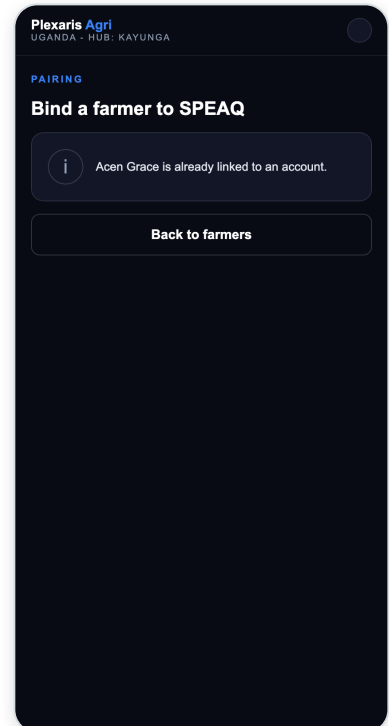

Kuna kilichoharibika (simu isiyo sahihi imethibitisha, msimbo umeisha muda, au ID inatumika tayari)

Ujumbe wa hitilafu unaonekana kwenye ukurasa wa kuunganisha. Mwombe mkulima ajaribu tena kutoka programu yake ya SPEAQ ID, kisha rudia hatua ya 4.

Mkulima amepata simu baadaye (alikuwa amewekwa "no smartphone")

Fungua onboarding gusa **Undo (farmer now has a smartphone)** . Kisha fuata hatua kuu hapo juu.

